


AG-601 acrylic fiberglass sleeving

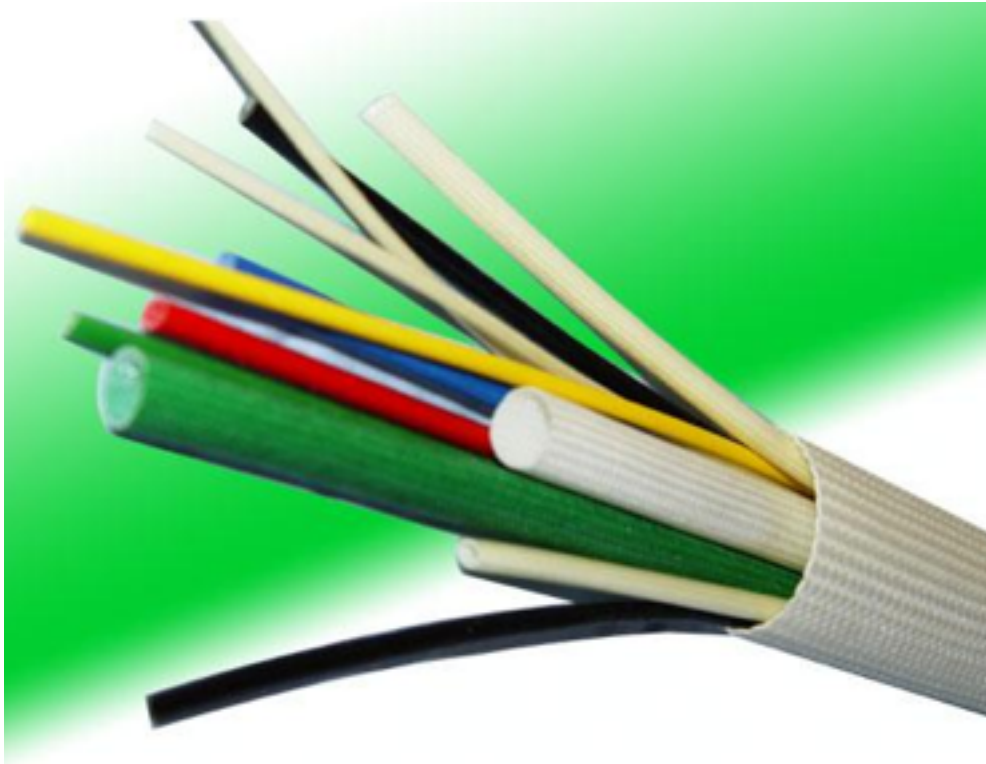

Acrylic fiberglass sleeving is made of non-alkali fiberglass with acrylic resin coating, it has reliable heat resistance, widely used as wiring insulation for motors, electrical appliance, etc.

Generic properties

1. Colour: original colour is yellow, also can be other colours according to request.
2. Out appearance: the surface is smooth, without defects that maybe affect the properties of the products.

Types and properties

Type	Properties	average voltage (V)
AG-I	High breakdown volage, resistant temperature 155 ℃.	7000
AG-II	Middle breakdown volage, resistant temperature 155 ℃.	4000
AG-III	Low breakdown volage, resistant temperature 155 ℃.	2500

Inner Diameter and wall depth

Standard	Inner Diameter (mm)	Tolerance	Wall Depth (mm)		
			Type I	Type II	Type III
	0.5-3.0	±0.20	0.45	0.45	0.40
	4.0-9.0	±0.25	0.60	0.55	0.50
	10-14	±0.50	0.80	0.70	0.60
	16-20	±1.00	1.00	0.90	0.80